


BACK DOOR TRIM

< ON-VEHICLE REPAIR >

4. Insert remover tool (A) between back door side finisher inner (1) and back door panel to disengage metal clips.

 : Metal clip

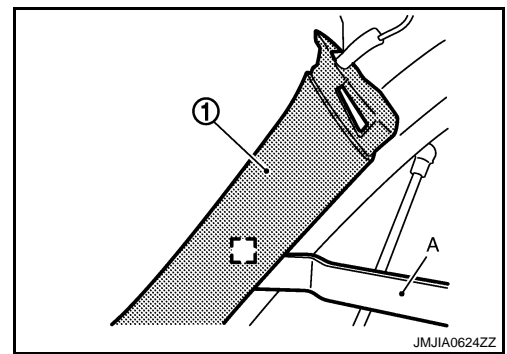

5. Remove back door side finisher inner.

INSTALLATION

Install in the reverse order of removal.

CAUTION:

When installing back door trim, check that clips are securely fitted in panel holes on body, and then press them in.

A
B
C
D
E
F
G
H
I
INT
K
L
M
N
O
P