


CENTER CONSOLE ASSEMBLY

< ON-VEHICLE REPAIR >

3. Remove console rear bracket.
 - Remove console rear bracket fixing screws (A).
 - Pull up console rear bracket (1).

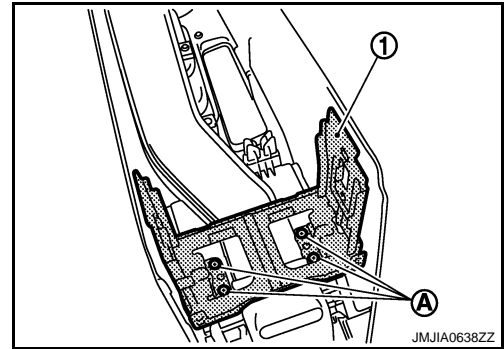

4. Remove rear ventilator duct.
 - Remove rear ventilator duct fixing screws.
 - Pull down rear ventilator duct.
5. Remove console lid assembly.
 - Remove console lid assembly fixing screws.
 - Pull up console lid assembly.
6. Remove console box assembly.
 - Remove console box assembly fixing screws.
 - Pull up console box assembly.
7. Remove cup holder assembly.
 - Remove cup holder assembly fixing screws.
 - Pull down cup holder assembly.

Assembly

Assemble in the reverse order of disassembly.